



CJF-100 Specification




Input Power	100~220V, 50~60Hz
Power Consumption	100W
LED Chip	LGIT
Warranty	5 years
CRI(Ra)	> 80
Luminous Efficiency(lm/W)	110/135
CCT(Kelvin)	3,000~6,500K
Power Factor(%)	> 95
Luminous Flux(lm)	11,000/13,500
View Angle	10/20/30/40/50/60/80/100°
IP Rating	65/67(option)
Operating Temperature	-20 ~ +50°C
Dimensions	Ø269×72mm / 296×265×72mm
Weight	2,76 / 3,34kg

CJF-120 Specification




Input Power	100~220V, 50~60Hz
Power Consumption	120W
LED Chip	LGIT
Warranty	5 years
CRI(Ra)	> 80
Luminous Efficiency(lm/W)	> 110/135/145
CCT(Kelvin)	3,000~6,500K
Power Factor(%)	> 95
Luminous Flux(lm)	13,200/16,200/17,400
View Angle	10/20/30/40/50/60/80/100°
IP Rating	65/67(option)
Operating Temperature	-20 ~ +50°C
Dimensions	Ø269×87mm / 296×265×72mm
Weight	2,80 / 3,34kg

Illuminance Cone Diagram

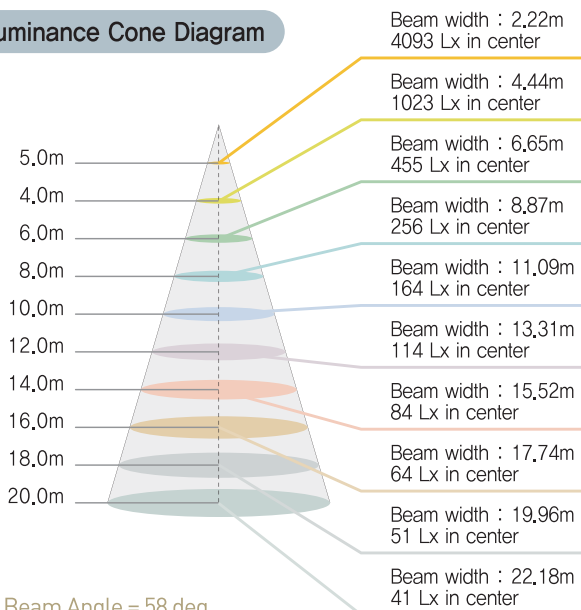

- Beam Angle = 58 deg.
- Based on 50% of maximum illuminance.

Illuminance Cone Diagram

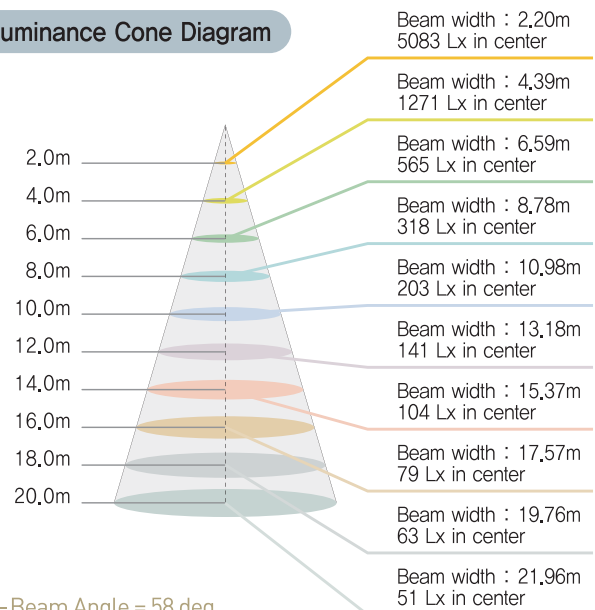

- Beam Angle = 58 deg.
- Based on 50% of maximum illuminance.